



Otjozondjupa Regional Council



Tel: (067) 303702/303619/304168
Fax: (067) 302760/302742

P.O. Box 1682
Otjiwarongo
NAMIBIA

Request for Sealed Quotations For Goods

Procurement Reference No:
G/RFQ/OTRCICT-02/2023/2024

DESCRIPTION OF GOODS

PROCUREMENT OF VIDEO CAMERA, DIGITAL STILL CAMERA AND ACCESSORIES FOR DIVISION ICT

Name of Bidder:

Contact Number of Bidder:

Email Address of Bidder:

Authorized Representative:

Total price:

Signature:

Closing Date & Time: 26th October 2023; 10h00

**Procurement Management Unit
Otjozondjupa Regional Council
P.O. Box 1682
Otjiwarongo
Namibia**

Tel: +264-67-303702

Fax: +264-67-30276



Otjozondjupa Regional Council



Tel: (067) 303702
Fax: (067) 302760

P.O. Box 1682
Otjiwarongo
NAMIBIA

Letter of Invitation

Bidder's name:

Contact number:

Procurement Reference No: G/RFQ/OTRCICT-02/2023/2024

Dear Sirs/Madam

PROCUREMENT OF VIDEO CAMERA, DIGITAL STILL CAMERA AND ACCESSORIES FOR MICT REGIONAL OFFICE


Otjozondjupa Regional Council invites you to submit your best quote for the items described in detail hereunder.

Any resulting contract shall be subject to the terms and conditions referred to in the document.

Queries, if any, should be addressed to **Mr. C Muhapi** via *email to Chris.Muhapi@mict.gov.na*

Please prepare and submit your quotation in accordance with the instructions given or inform the undersigned if you will not be submitting a quotation.

Yours faithfully,

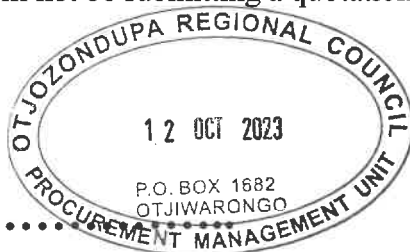

.....
Mrs S.M.K. TUAHUKU

SECRETARY: PROCUREMENT COMMITTEE

SECTION I: INSTRUCTIONS TO BIDDERS

1. Rights of Public Entity

Otjonzondjupa Regional Council reserves the right:

- (a) To split the contract as per the lowest evaluated cost per item, and
- (b) To accept or reject any quotation or to cancel the quotation process and reject all quotations at any time prior to contract award.

2. Preparation of Quotations

You are requested to quote for the items mentioned in Section III by completing, signing and returning:

- (a) The Quotation Letter in Section II with its annexure for *Bid Securing Declaration*
- (b) The List of Goods and Price Schedule in Section III;
- (c) The Specifications and Compliance Sheet in Section V; and
- (d) Any other attachments deemed appropriate.

You are advised to carefully read the complete Request for Sealed Quotations document, including the Special Conditions of Contract in Section VII, before preparing your quotation. The standard forms in this document may be retyped for completion but the Bidder is responsible for their accurate reproduction.

3. Validity of Quotations

The Quotation validity period shall be *[90]* days from the date of submission deadline.

4. Eligibility Criteria

To be eligible to participate in this Quotation exercise, you should:

- (a) have a valid copy of Founding Statement for any of the followings:
 - i. *an entity incorporated or registered under the company or close corporation laws in Namibia;*
 - ii. *co-operative registered under the laws regulating co-operatives in Namibia;*
 - iii. *document serving as of registration as a Trust and Trust deed for a trust registered under laws regulating trusts in Namibia;*
- (b) have valid original or certified copy of Good Standing Tax Certificate;
- (c) have valid original or certified copy of Good Standing Social Security Certificate;
- (d) have a valid certified copy of Affirmative Action Compliance Certificate or proof from Employment Equity Commissioner that bidder is not a relevant employer or exemption issued in terms of Section 42 of the Affirmative Action Act, 1998;
- (e) have or sign a written undertaking as contemplated in section 138(2) of the Labour Act, 2007

- (f) sign the Bid Securing Declaration
- (g) original or certified copy of partnership agreement in the case of partnership, a valid Joint venture agreement in the case of a joint venture or valid agreement in case of other similar arrangement, but a bidder or supplier who is a sole proprietor only needs to comply of (a) to (d)
- (h) Attach brochure of the product;
- (i) Attached Manufacturer's authorization Certificate

5. Bid Securing Declaration

Bidders are required to *subscribe to a Bid Securing Declaration* for this procurement process.

6. Delivery

Delivery shall be **14 days** after acceptance/issue of Purchase Order. Deviation in delivery period **shall not be accepted**

6.1. The following tests and inceptions will be conducted on the goods at delivery:

Verification according to technical specifications

7. Sealing and Marking of Quotations

Quotations should be sealed in a single envelope, clearly marked with the **Procurement Reference Number**, addressed to **The Secretary for Otjozondjupa Regional Council Procurement Committee; P.O. Box 1682; Otjiwarongo**; with the Bidder's name and contact information at the back of the envelope.

8. Submission of Quotations

Quotations should be deposited in the Bid Box located at **Otjozondjupa Regional Council's head Quarters at 22 Henk Willemse Street, Otjiwarongo; New Building on the Ground Floor** not later than **26th October 2023 at 10h00**. Bids by post should reach **Otjozondjupa Regional Council**; by the same date and time at latest. Late bids will be rejected and returned to the bidder unopened. Bids received by e-mail or fax will not be considered.

9. Opening of Quotations

Bids will be opened by the Procurement Management Unit in the Regional Council's Block B, Ground Floor Administration Boardroom in the new building, Otjiwarongo on the closing date at 10h00. Bidders or their representatives may attend the Bid Opening if they choose to do so.

10. Evaluation of Quotations

Otjozondjupa regional Council shall have the right to request for clarifications in writing during evaluation. Offers that are substantially responsive shall be compared on the basis of price, to determine the lowest evaluated substantially responsive bid which meets the qualification criteria.

11. Technical Compliance

Bidders shall submit along with their quotations documents, catalogues and any other literature to substantiate compliance with the required specifications and to qualify deviations if any with respect to Otjozondjupa Regional Council's requirements.

The Specifications, Performance Requirements and Compliance Sheet details the minimum specifications of the goods/items to be supplied. The specifications have to be met but no credit will be given for exceeding the specifications.

12. Prices and Currency of Payment

Prices shall be fixed in Namibian Dollars.

13. Margin of Preference

Not applicable

14. Award of Contract

The Bidder having submitted the lowest evaluated responsive quotation and qualified to supply the goods/items and related services shall be selected for award of contract. Award of contract shall be by issue of a Purchase Order/Letter of Acceptance in accordance with terms and conditions contained in Section VI: Contract Agreement and General Conditions of Contract.

15. Performance Security

Not applicable

16. Notification of Award and Debriefing

Otjozondjupa Regional Council shall after award of contract promptly inform all unsuccessful bidders in writing of the name and address of the successful bidder and the contract amount and post a notice of award on its website within seven days. Furthermore, the Otjozondjupa Regional Council shall attend to all requests for debriefing made in writing within (7) days of the unsuccessful bidders being informed of the award.

17. Terms of payment:

Payment will be made after delivery of goods upon presentation, by the supplier, of the signed Purchase Order and Invoice; within thirty (30) days.

SECTION II: QUOTATION LETTER

(to be completed by Bidders)

*[Complete this form with all the requested details and submit it as the first page of your quotation with the Price list and documents requested above. A signature and authorisation on this form will confirm that the terms and conditions of the RFQ prevail over any attachments. **If your quotation is not authorised, it will be rejected.**]*

Quotation addressed to:	
Procurement Reference Number:	
Subject matter of Procurement:	

We offer to supply the items listed in the attached List of Goods and Price Schedule as per the defined specifications, *except for the qualified deviations [Bidder may delete this phrase in case of no deviation]* and, in accordance with the terms and conditions stated in your Request for Quotations referenced above.

We confirm that we are eligible to participate in this Quotation exercise and meet the eligibility criteria specified in Section 1: Instruction to Bidders.

We undertake to abide by ethical conduct during the procurement process and the execution of any resulting contract.

We have read and understood the content of the *Bid Securing Declaration (BSD)* attached hereto and subscribe fully to the terms and conditions contained therein. We further understand that this subscription could lead to *disqualification on the grounds mentioned in the BDS*.

The validity period of the Quotation is (30) days from the date of the bid submission deadline.

We confirm that the prices quoted in the List of Goods and Price Schedule are fixed and firm and will not be subject to revision or variation, if we are awarded the contract **prior to the expiry** date of the quotation validity.

The delivery period offered from the date of issue of Purchaser Order/ Letter of Acceptance is as shown in the List of Goods items and Price Schedule.

Quotation Authorised by:

Name of Bidder		Company's Address and seal	
Contact Person			
Name of Person Authorising the Quotation:		Position:	Signature:
Date		Phone No./Fax	

BID SECURING DECLARATION

(Section 45 of Act) (Regulation 37(5) and 56(2))

Date:Day/month/year

Procurement Ref No.: G/RFQ/OTRCICT- 02/2023/2024

To: Otjozondjupa Regional Council

I/We* understand that in terms of section 45 of the Act a public entity must include in the bidding document the requirement for a declaration as an alternative form of bid security.

I/We* accept that under section 45 of the Act, I/we* may be suspended or disqualified in the event of

- (a) a modification or withdrawal of a bid after the deadline for submission of bids during the period of validity;**
- (b) refusal by a bidder to accept a correction of an error appearing on the face of a bid;**
- (c) failure to sign a procurement contract in accordance with the terms and conditions set forth in the bidding document, should I/We* be successful bidder; or**
- (d) failure to provide security for the performance of the procurement contract if required to do so by the bidding document.**

I/We* understand this bid securing declaration ceases to be valid if I am/We are* not the successful Bidder

Signed:

[insert signature of person whose name and capacity are shown]

Capacity of:

[indicate legal capacity of person(s) signing the Bid Securing Declaration]

Name:

[insert complete name of person signing the Bid Securing Declaration]

Duly authorized to sign the bid for and on behalf of: [insert complete name of Bidder]

Dated on _____ day of _____, _____

[insert date of signing]

Corporate Seal (where appropriate)

[Note*: In case of a joint venture, the bid securing declaration must be in the name of all partners to the joint venture that submits the bid.]

****delete if not applicable / appropriate***

SECTION III: LIST OF GOODS AND PRICE SCHEDULE

QUOTATION FOR: PROCUREMENT OF VIDEO CAMERA, DIGITAL STILL CAMERA AND ACCESSORIES PROCUREMENT REF NO: G/RFQ/OTRCICT-02/2023/2024

INSTRUCTIONS TO THE PUBLIC BODY			INSTRUCTIONS TO BIDDERS						
At time of preparation of the RFQ, Columns A to D shall be filled in by the Public Entity. [To be filled by the Public Entity]			Bidders shall fill-in columns F, G & H and fill the total E= mark with a *if an equivalent is quoted F= Rate per unit G= Total price for one item (C x F) ● If an equivalent is quoted, please attach to your quote appropriate technical information & specification ● Bidders shall fill in and sign the bottom section of this page						
A Item no.	B Description of Goods	C Quantity required	D Unit of measures	E *	F Price per unit NAD ¹	G Total price without VAT NAD	H VAT: NAD	I Delivery weeks) (days/m onth	Country of Origin
1	CAMERA (CAMRECORDER); PXW150 Camera specifications ND filters OFF: CLEAR Built-in Optical Filters: 1: 1/4ND 2: 1/16ND 3: 1/64ND Effective Picture Elements: 3840 (H) x 2160 (V) Gain: -3, 0, 3, 6, 9, 12,15, 18, 21, 24, 27, 30, 33 dB, AGC	1							

Imaging Device:

Type: 1.0"-type (13.2 mm x 8.8 mm) back-illuminated Exmor RS CMOS sensor Pixel Count: Approx. 20 M pixels (total) Approx. 14.2 M pixels (Effective)

Minimum Illumination:

1.7 lux (Low Lux)

Shutter Speed (Time):

[60i]: 1/8 - 1/10,000 (1/6 - 1/10,000 when shooting with 24p) [50i]: 1/6 - 1/10,000

Slow & Quick Motion Function:

[60i]: XAVC-L HD: Frame rate selectable

1.2.4.8.15.30,60, and 120 fps

[50i]: XAVC-L HD: Frame rate selectable

1.2.3.6.12.25,50, and 100 fps

[60i]: MPEG HD: Frame rate selectable

1.2.4.8.15.30 fps

[50i]: MPEG HD: Frame rate selectable

1.2.3.6.12.25 fps

[60i]: AVCHD: Frame rate selectable

1.2.4.8.15.30,60 fps

[50i]: AVCHD: Frame rate selectable

1.2.3.6.12.25,50 fps

White Balance:

Preset (Indoor: 3200K, Outdoor: 5600K \pm 7 steps,

Color temperature set range: 2300-15000K),

Onepush A, B, Auto selectable

Battery Operating Time:

Approx. 260 min. with NP-F770 battery (while recording with LCD, XAVC 1080/60i, 50 Mbps)

Approx. 400 min. with NP-F970 battery (while recording with LCD, XAVC 1080/60i, 50 Mbps)

Dimensions (W x H x D):

6 3/4 x 7 3/8 x 14 5/8 inches
 (With the accessories (lens hood, large eyecup), excluding the grip belt and including the projecting parts)

Mass:
 Approx. 4lb 3 oz (Body only)
 Approx. 5 lb (with lens hood, eyecup, NP-F770 battery)

Operating Temperature:
 32°F to 104°F

Power Consumption:
 Approx. 6.3 W (while recording with viewfinder and XAVC HD 1080/60i 50 Mbps)
 Approx. 6.6 W (while recording with LCD and XAVC HD 1080/60i 50 Mbps)

Power Requirements:
 DC In: 8.4V, Battery: 7.2 V

RECORDING FORMATS:

Video:
 XAVC-L QFHD: MPEG-4 AVC/H.264 4:2:0 Long profile
 XAVC-L HD : MPEG-4 AVC/H.264 4:2:2 Long profile
 XAVC Proxy: MPEG-4 AVC/H.264 4:2:0 Long profile
 MPEG HD422: MPEG-2 422P@HL 4:2:2 Long profile
 MPEG HD420: MPEG-2 MP@HL 4:2:0 Long profile
 MPEG HD Proxy: MPEG-4 AVC/H.264 4:2:0 Long profile
 AVCHD : MPEG-4 AVC/H.264 AVCHD 2.0 format compatible

	<p>Audio: XAVC-L QFHD : Linear PCM 2ch, 24bit, 48kHz XAVC-L HD : Linear PCM 2ch, 24bit, 48kHz XAVC Proxy : AAC-LC 2ch, 16bit, 48kHz MPEG HD422 : Linear PCM 2ch, 24bit, 48kHz MPEG HD420 : Linear PCM 2ch, 16bit, 48kHz MPEG HD Proxy : AAC-LC 2ch, 16bit, 48kHz AVCHD : Linear PCM 2ch, 16bit, 48kHz Dolby Digital 2ch, 16bit, 48kHz</p> <p>Recording Frame Rate: XAVC-LQFHD (3840 x 2160) @29.97p, 25p, 23.98p 100Mbps/60Mbps XAVC-L HD (1920 x 1080) @59.94p, 50p, 50 Mbps/35 Mbps XAVC-L HD (1920 x 1080) @59.94i, 50i, 50 Mbps/35 Mbps/25 Mbps XAVC-L HD (1920 x 1080) @29.97p, 25p, 23.98p, 50 Mbps/35 Mbps XAVC-L HD (1280 x 720)@59.94p, 50p, 50Mbps XAVC Proxy (1280 x 720) @59.94p, 50p, 29.97p, 25p, 23.98p 9Mbps XAVC Proxy (640 x 360) @59.94p, 50p, 29.97p, 25p, 23.98p, 3Mbps MPEG HD422 (1920 x 1080) @59.94i, 50i, 29.97p, 25p, 23.98p, 50 Mbps MPEG HD422 (1280 x 720) @59.94p, 50p, 50Mbps</p> <p>MPEG HD420 (1920 x 1080) @59.94i, 50i, 29.97p, 25p, 23.98p, HQ mode (35Mbps) MPEG HD420 (1440 x 1080) @59.94i, 50i, HQ mode (35Mbps) MPEG HD420 (1280 x 720) @59.94p, 50p, HQ</p>								
--	--	--	--	--	--	--	--	--	--

	<p>mode (35Mbps) MPEG HD Proxy (1280 x 720) @59.94p, 50p, 29.97p, 25p, 23.98p, 9Mbps MPEG HD Proxy (640 x 360) @59.94p, 50p, 29.97p, 25p, 23.98p, 3Mbps AVCHD (1920 x 1080)@59.94p, 50p, PS mode (28 Mbps) AVCHD (1920 x 1080) @59.94i/50i/29.97p/25p/23.98p, FX mode (24 Mbps), FH mode(17 Mbps) AVCHD (1280 x 720)@59.94p, 50p, FX mode (24 Mbps) FH mode (17 Mbps) HQ mode (9 Mbps)</p> <p>Recording/Playback Time: XAVC-L QFHD 100 mode, Approx. 65 min with 64 GB memory card XAVC-L QFHD 60 mode, Approx. 100 min with 64 GB memory card XAVC-L HD 50 mode, Approx. 120 min with 64 GB memory card XAVC-L HD 35 mode, Approx. 170 min with 64 GB memory card XAVC-L HD 25 mode, Approx. 220 min with 64 GB memory card MPEG HD422 @LPCM 2ch 50 Mbps, Approx. 110 min with 64 GB memory card MPEG HD420 @LPCM 2ch HQ Mode, Approx. 170 min with 64 GB memory card AVCHD@LPCM 2ch PS Mode, Approx. 290 min with 64 GB memory card AVCHD@LPCM 2ch FX Mode, Approx. 340 min with 64 GB memory card AVCHD@LPCM 2ch FH Mode, Approx. 450 min</p>								
--	--	--	--	--	--	--	--	--	--

with 64 GB memory card
 AVCHD@LPCM 2ch HQ Mode, Approx. 750 min
 with 64 GB memory card
Storage Temperature:
 -4°F to +140°F

INPUTS/OUTPUTS SPECIFICATIONS

Audio Input:
 XLR-type 3-pin (female) (x2), line/mic/mic +48 V
 selectable

Audio Output:
 Integrated into Multi/Micro USB jack(x1), RCA
 pin(Monaural)(x1)

DC Input:
 DC jack

HDMI Output:
 HDMI connector (Type A)

Headphone Output:
 Stereo mini jack (x1)

MIC:
 Built-in Microphone: Omni-directional stereo
 electret condenser microphone

Remote:
 Stereo mini-mini jack (Φ2.5 mm)

SDI Output:
 BNC (x1), 3G/HD/SD SMPTE ST 424/ST 292-
 1/ST 259 standards

Speaker Output:
 Monaural

Video Output:
 Integrated into Multi/Micro USB jack (x1), RCA
 pin(x1), Composite 1.0Vp-p, 75 Ω

	<p>LENS SPECIFICATIONS Filter Diameter: M62 mm Focal Length: f = 9.3 - 111.6 mm equivalent to f = 29.0 - 348.0 mm on 35 mm lens (16:9) Focus: AF/MF selectable, 10 mm to ∞ (Wide), 1000 mm to ∞ (Tele) Iris: F2.8 - F4.5 auto/manual selectable Lens Mount: Fixed Zoom Ratio: 12x (optical), servo</p> <p>MEDIA SPECIFICATIONS Type: MS/SD(1),SD(1)</p> <p>MONITORING SPECIFICATIONS Built-in LCD Monitor: 8.8cm (3.5 type), Approx. 1.56M dots Viewfinder: 1.0cm (0.39 type) OLED, Approx. 1.44M dots</p>						
--	--	--	--	--	--	--	--

2	<p>MVH502A Fluid Head and 546B Tripod System with Carrying Bag</p>	1						
Head								
Load Capacity	7.0 kg							
Counter Balance System	Supports 4.0 kg							
Center of Gravity	5.49 cm							
Quick Release/Wedge Plate	504PLONG							
Tilt Drag	Continuously adjustable from 0 to max level							
Tilt Range	-80° / +90°							
Leg	Yes							
Stages/Sections	Yes							
Spring Loaded Counter Balance	Yes							
Pan Range	360°							
Pan Lock	Yes							
Legs								

3	<p>Material Aluminum</p> <p>Head Attachment Fitting 75mm bowl</p> <p>Leg Stages Two/three</p> <p>Center Brace Yes</p> <p>System</p> <p>Load Capacity 7.0 kg</p> <p>Maximum Height 168.00 cm</p> <p>Minimum Height 43.99 cm</p> <p>Closed Length 83.01 cm</p> <p>Leveling Bubble/Illuminated Yes/No</p> <p>Weight 5.50 kg</p>						
3	<p>FILMING LIGHTINGS: LED 500 Light Kit Version 2.0</p> <ul style="list-style-type: none"> • Four reflective barndoors to maximize the light efficiency • Metallic mounting bracket to be vertically or horizontally attached • Integrated dimmer dial to have stepless light output control for desired effects • High-brightness LEDs controlled into 4 groups to fine tune the light at your own needs • Cooling fan for prolonged use 	2					

	<ul style="list-style-type: none"> • Lightweight and compact in size • Light stand • Carry bags <p>SPECIFICATIONS</p> <p>Color Temperature 5600~6200K (1m)</p> <p>Lumen 2200Lux (1m); 550Lux (2m)</p> <p>Power Source (AC) 100V~240V 50/60Hz</p> <p>LED Qty 500pcs</p> <p>Fuse 5A</p> <p>Dimension 352*232*88mm</p>					
4	<p>DIGITAL CAMERA-MOUNT WIRELESS OMNI LAVALIER MICROPHONE SYSTEM (BLACK, 2.4 GHZ)</p> <ul style="list-style-type: none"> • Content Creators, Vlogs, Live Streaming • 2 x Compact Clip-On Transmitter/Mics • 2 x Omnidirectional Lavalier Mics • Compact Dual-Channel Receiver • Separate 3.5mm Main & Headphone Outputs • Easy to Use, Informative OLED Screens • Mute Function, Mono/Stereo Output Mode • Internal 10-Hour Batteries 	1 Set				

	<ul style="list-style-type: none"> • Charging Case with 35 Hours of Power • 18 Systems at Once Max, up to 100m <p>Range Specifications System Wireless Technology Digital 2.4 GHz Included Transmitters 2 x Clip-On with Microphone Diversity Non-Diversity RF Channel Scanning Auto-Scan Max Operating Range 100 m (Line of Sight) Max Transmitters per Band 18</p> <p>Sample Rate/Resolution 48 kHz / 16-Bit Latency < 8 ms Modulation GFSK SNR >84 dB THD 0.1 %</p> <p>Receiver Receiver Type Camera-Mount / Backpack / Portable Mounting Options Belt Clip, Shoe-Mount (with Included Hardware)</p>								
--	--	--	--	--	--	--	--	--	--

	<p>Antenna 1 x Internal</p> <p>Number of Audio Channels 2</p> <p>Audio I/O 1 x 3.5 mm TRS Female Unbalanced Output 1 x 3.5 mm TRS Female Unbalanced Headphone Output</p> <p>Audio Output Level -16.5 dBu</p> <p>Frequency Response 20 Hz to 20 kHz</p> <p>USB/Lightning Connectivity 1 x USB Type-C Female (Bus Power, Charging)</p> <p>Power Requirements Battery or Bus Power (USB)</p> <p>Battery Type 1 x Built-In Rechargeable (Included, Not Replaceable)</p> <p>Approx. Battery Life 10 Hours</p> <p>Display & Indicators 1 x OLED (Battery Status, Data)</p> <p>TRANSMITTER</p> <p>Transmitter type: Clip-On with Microphone</p> <p>RF Output Power: < 10 mW</p> <p>Audio I/O: 1 x 3.5 mm TRS Female Unbalanced Input</p>					
--	---	--	--	--	--	--

Audio Input Level:
-20 to -42 dBV (at 0 dB Gain)
Frequency Response:
20 Hz to 20 kHz
Antenna:
1 x Internal
Power Requirements:
Battery or Bus Power (USB)
Battery Type:
1 x Built-In Rechargeable (Included, Not Replaceable)
Approx. Battery Life:
10 Hours
Display & Indicators:
1 x OLED (Audio Level, Battery Status, Mute, Power, Signal Strength)

MICROPHONE

Sound Field:
Mono
Operating Principle:
Pressure Operated
Capsule:
Electret Condenser
Polar Pattern:
Omnidirectional
Maximum SPL:
110 dB SPL
THD:
< 1%
Sensitivity:
-39 dB

5	<p>Output: 1 x 3.5 mm TRS Male Unbalanced</p>								
5	<p>UNIVERSAL TRIPOD STAND</p> <ul style="list-style-type: none"> • Phone holder fits phones from 2.25" to 3.75" wide • Safe Load: 3 kg (6.61 lbs) • Maximum Load: 5 kg (11 lbs) • Pan: 360° • Tilt: 180° • Panhead Tilt: 90° • Mounting: 1/4"-20 support • Material: aluminum alloy/ABS • Dimenstions: <ul style="list-style-type: none"> - Minimum height: 45 cm \pm 0.5 mm (18" \pm 0.02") - Maximum height (including center height): 140 cm \pm 0.5 mm (55" \pm 0.02") - Tube diameter: 20 mm \pm 0.5 mm (0.79" \pm 0.02") • Weight: 1.25 kg (2.6 lbs) • Color: black • 4-section column legs • 3 adjustment knobs • 1 horizontal bubble level • Compatible with 1/4"-20 devices 	2							

6	<p>Mirrorless Camera with 18-45mm and 55-210mm Lenses</p> <ul style="list-style-type: none"> ● 24.2MP APS-C CMOS Sensor ● DIGIC X Image Processor ● UHD 4K 30p Video Recording ● Dual Pixel CMOS AF II with 651 Zones ● 2.36m-Dot Electronic Viewfinder ● 3.0" 1.62m-Dot Vari-Angle Touchscreen ● 15 fps Electronic Shutter ● Movie for Close-Up Demos Mode ● Vertical Movie Mode ● Multi-Function Shoe, Wi-Fi, and Bluetooth <p>Imaging</p> <p>Lens Mount: RF</p> <p>Sensor Resolution : Effective: 24.2 Megapixel</p> <p>Sensor Type : 22.3 x 14.9 mm (APS-C) CMOS</p> <p>Crop Factor: 1.6x</p> <p>Image Stabilization: None</p> <p>Built-In ND Filter: None</p> <p>Capture Type: Stills & Video</p> <p>Exposure Control</p> <p>Shutter Type: Electronic Shutter</p> <p>Shutter Speed: Electronic Shutter 1/8000 Up to 30 Seconds Electronic Front Curtain Shutter 1/4000 Up to 30 Seconds</p>	1 camera & 2 Lenses							
---	---	---------------------	--	--	--	--	--	--	--

	<p>Bulb/Time Mode: Bulb Mode, Time Mode</p> <p>ISO Sensitivity: Photo/Video 100 to 32,000 (Extended: 51,200)</p> <p>Metering Method: Center-Weighted Average, Evaluative, Partial, Spot</p> <p>Exposure Modes: Aperture Priority, Manual, Program, Shutter Priority</p> <p>Exposure Compensation: -3 to +3 EV (1/3 EV Steps)</p> <p>Metering Range: -2 to 20 EV</p> <p>White Balance: Presets: Auto, Cloudy, Color Temperature, Custom, Daylight, Flash, Fluorescent (White), Shade, Tungsten</p> <p>Continuous Shooting: Electronic Shutter Up to 15 fps for up to 28 Frames (JPEG) / 7 Frames (Raw) Electronic Shutter Up to 12 fps for up to 42 Frames (JPEG) / 7 Frames (Raw)</p> <p>Interval Recording: Yes</p> <p>Self-Timer: 2/10-Second Delay</p>								
--	---	--	--	--	--	--	--	--	--

	<p>Focus Mode: Continuous-Servo AF, Manual Focus, Single-Servo AF Autofocus Points: Photo Phase Detection: 4503 Video Phase Detection: 3713 Autofocus Sensitivity: -4 to +20 EV</p> <p>Viewer Type: Built-In Electronic (OLED) Size: 0.39" Resolution: 2,360,000 Dot Eye Point: 22 mm Coverage: 100% Magnification: Approx. 96x Diopter Adjustment: -3 to +1</p> <p>Flash Built-In Flash: Yes Maximum Sync Speed: 1/250 Second Flash Compensation: -3 to +3 EV (1/3 EV Steps) Dedicated Flash System: eTTL External Flash Connection: Intelligent Hot Shoe</p> <p>Environmental Operating Temperature: 0 to 40°C Operating Humidity: 0 to 85%</p> <p>General</p>					
--	--	--	--	--	--	--

	<p>Battery Type: 1 x LP-E17 Rechargeable Lithium Polymer, 7.2 VDC, 1040 mAh</p> <p>Tripod Mounting Thread: 1 x 1/4"-20 Female (Bottom)</p> <p>Dimensions (W x H x D): 116.3 x 85.5 x 68.8 mm</p> <p>Weight: 375 g (With Battery, Recording Media)328 g (Body Only)</p> <p>RF-S 18-45mm f/4.5-6.3 IS STM Lens</p> <p>Focal Length: 18 to 45mm (35mm Equivalent)</p> <p>Focal Length: 29 to 72mm)</p> <p>Maximum Aperture: f/4.5 to 6.3</p> <p>Minimum Aperture: f/32</p> <p>Lens Mount: RF</p> <p>Lens Format Coverage: APS-C</p> <p>Angle of View: 74° 20' to 33° 40'</p> <p>Minimum Focus Distance: 20 cm</p> <p>Maximum Magnification: 0.16x</p> <p>Optical Design: 7 Elements in 7 Groups</p> <p>Diaphragm Blades: 7, Rounded</p> <p>Focus Type: Autofocus</p> <p>Image Stabilization: Yes</p> <p>Filter Size: 49 mm (Front)</p> <p>Dimensions (ø x L): 68.9 x 44.3 mm</p> <p>Weight: 130 g</p>								
--	---	--	--	--	--	--	--	--	--

	<p>RF-S 55-210mm f/5-7.1 IS STM Lens</p> <p>Focal Length: 55 to 210mm (35mm Equivalent) Focal Length: 88 to 336mm)</p> <p>Maximum Aperture: f/5 to 7.1 Lens Mount: RF-S Lens Format Coverage: APS-C Angle of View: 27° 50' to 7° 25' Minimum Focus Distance: 70 cm Maximum Magnification: 0.28x Optical Design: 11 Elements in 8 Groups Diaphragm Blades: 7 Focus Type: Autofocus Image Stabilization: Yes Filter Size: 55 mm (Front) Dimensions (ø x L): 6.9 x 9.4 cm Length at Maximum Extension: 13.5 cm Weight: 270 g</p>						
TOTAL PRICE							

QUOTATION AUTHORIZED BY:			
NAME:	POSITION:	SIGNATURE	DATE
NAME OF BIDDER:		ADDRESS:	

NB: Prices must be quoted in Namibian Dollars

SECTION IV: SPECIFICATIONS AND PERFORMANCE REQUIREMENTS

The bidders must ensure that materials quoted for are according to the technical specifications provided below.

Verification will be done at delivery

SECTION V: SPECIFICATIONS AND COMPLIANCE SHEET

Procurement Reference Number: G/RFQ/OTRCICT-02/2023/2024

[Bidders should complete columns C and D with the specification of the goods offered. Also state "comply" or "not comply" and give details of any non-compliance/deviation to the specification required. Attach detailed technical literature if required. Authorise the specification offered in the signature block below.]

<i>Item No</i>	<i>Technical Specification Required (Minimum)</i>	<i>Compliance of Specification Offered</i>	<i>Details of Non-Compliance/ Deviation (if applicable)</i>
<i>A*</i>	<i>B*</i>	<i>C</i>	<i>D</i>
1	<p><u>CAMERA (CAMCORDER):</u> <u>PXW150</u></p> <p>Camera specifications</p> <p>ND filters OFF: CLEAR</p> <p>Built-in Optical Filters: 1: 1/4ND 2: 1/16ND 3: 1/64ND</p> <p>Effective Picture Elements: 3840 (H) x 2160 (V)</p> <p>Gain: -3, 0, 3, 6, 9, 12,15, 18, 21, 24, 27, 30, 33 dB, AGC</p> <p>Imaging Device: Type: 1.0"-type (13.2 mm x 8.8 mm) back-illuminated Exmor RS CMOS sensor Pixel Count: Approx. 20 M pixels (total) Approx. 14.2 M pixels (Effective)</p> <p>Minimum Illumination: 1.7 lux (Low Lux)</p> <p>Shutter Speed (Time): [60i]: 1/8 - 1/10,000 (1/6 - 1/10,000 when shooting with 24p) [50i]: 1/6 - 1/10,000</p>		

<i>Item No</i>	<i>Technical Specification Required (Minimum)</i>	<i>Compliance of Specification Offered</i>	<i>Details of Non-Compliance/ Deviation (if applicable)</i>
<i>A*</i>	<i>B*</i>	<i>C</i>	<i>D</i>
	<p>Slow & Quick Motion Function: [60i]: XAVC-L HD: Frame rate selectable 1.2.4.8.15.30,60, and 120 fps [50i]: XAVC-L HD: Frame rate selectable 1.2.3.6.12.25,50, and 100 fps [60i]: MPEG HD: Frame rate selectable 1.2.4.8.15.30 fps [50i]: MPEG HD: Frame rate selectable 1.2.3.6.12.25 fps [60i]: AVCHD: Frame rate selectable 1.2.4.8.15.30,60 fps [50i]: AVCHD: Frame rate selectable 1.2.3.6.12.25,50 fps</p> <p>White Balance: Preset (Indoor: 3200K, Outdoor: 5600K±7 steps, Color temperature set range: 2300-15000K), Onepush A, B, Auto selectable</p> <p>Battery Operating Time: Approx. 260 min. with NP-F770 battery (while recording with LCD, XAVC 1080/60i, 50 Mbps) Approx. 400 min. with NP-F970 battery (while recording with LCD, XAVC 1080/60i, 50 Mbps)</p> <p>Dimensions (W x H x D): 6 3/4 x 7 3/8 x 14 5/8 inches (With the accessories (lens hood, large eyecup), excluding the grip belt and including the projecting parts)</p> <p>Mass: Approx. 4lb 3 oz (Body only) Approx. 5 lb (with lens hood, eyecup, NP-F770 battery)</p> <p>Operating Temperature: 32°F to 104°F</p> <p>Power Consumption: Approx. 6.3 W (while recording with viewfinder and XAVC HD 1080/60i 50 Mbps) Approx. 6.6 W (while recording with LCD and XAVC HD 1080/60i 50 Mbps)</p> <p>Power Requirements: DC In: 8.4V, Battery: 7.2</p>		

<i>Item No</i>	<i>Technical Specification Required (Minimum)</i>	<i>Compliance of Specification Offered</i>	<i>Details of Non-Compliance/ Deviation (if applicable)</i>
<i>A*</i>	<i>B*</i>	<i>C</i>	<i>D</i>
	<p>RECORDING FORMATS:</p> <p>Video: XAVC-L QFHD: MPEG-4 AVC/H.264 4:2:0 Long profile XAVC-L HD : MPEG-4 AVC/H.264 4:2:2 Long profile XAVC Proxy: MPEG-4 AVC/H.264 4:2:0 Long profile MPEG HD422: MPEG-2 422P@HL 4:2:2 Long profile MPEG HD420: MPEG-2 MP@HL 4:2:0 Long profile MPEG HD Proxy: MPEG-4 AVC/H.264 4:2:0 Long profile AVCHD : MPEG-4 AVC/H.264 AVCHD 2.0 format compatible</p> <p>Audio: XAVC-L QFHD : Linear PCM 2ch, 24bit, 48kHz XAVC-L HD : Linear PCM 2ch, 24bit, 48kHz XAVC Proxy : AAC-LC 2ch, 16bit, 48kHz MPEG HD422 : Linear PCM 2ch, 24bit, 48kHz MPEG HD420 : Linear PCM 2ch, 16bit, 48kHz MPEG HD Proxy : AAC-LC 2ch, 16bit, 48kHz AVCHD : Linear PCM 2ch, 16bit, 48kHz Dolby Digital 2ch, 16bit, 48kHz</p> <p>Recording Frame Rate: XAVC-LQFHD (3840 x 2160) @29.97p, 25p, 23.98p 100Mbps/60Mbps XAVC-L HD (1920 x 1080) @59.94p, 50p, 50 Mbps/35 Mbps XAVC-L HD (1920 x 1080) @59.94i, 50i, 50 Mbps/35 Mbps/25 Mbps XAVC-L HD (1920 x 1080) @29.97p, 25p, 23.98p, 50 Mbps/35 Mbps XAVC-L HD (1280 x 720)@59.94p,</p>		

<i>Item No</i>	<i>Technical Specification Required (Minimum)</i>	<i>Compliance of Specification Offered</i>	<i>Details of Non-Compliance/ Deviation (if applicable)</i>
<i>A*</i>	<i>B*</i>	<i>C</i>	<i>D</i>
	<p>50p, 50Mbps XAVC Proxy (1280 x 720) @59.94p, 50p, 29.97p, 25p, 23.98p 9Mbps XAVC Proxy (640 x 360) @59.94p, 50p, 29.97p, 25p, 23.98p, 3Mbps MPEG HD422 (1920 x 1080) @59.94i, 50i, 29.97p, 25p, 23.98p, 50 Mbps MPEG HD422 (1280 x 720) @59.94p, 50p, 50Mbps MPEG HD420 (1920 x 1080) @59.94i, 50i, 29.97p, 25p, 23.98p, HQ mode (35Mbps) MPEG HD420 (1440 x 1080) @59.94i, 50i, HQ mode (35Mbps) MPEG HD420 (1280 x 720) @59.94p, 50p, HQ mode (35Mbps) MPEG HD Proxy (1280 x 720) @59.94p, 50p, 29.97p, 25p, 23.98p, 9Mbps MPEG HD Proxy (640 x 360) @59.94p, 50p, 29.97p, 25p, 23.98p, 3Mbps AVCHD (1920 x 1080)@59.94p, 50p, PS mode (28 Mbps) AVCHD (1920 x 1080) @59.94i/50i/29.97p/25p/23.98p, FX mode (24 Mbps), FH mode(17 Mbps) AVCHD (1280 x 720)@59.94p, 50p, FX mode (24 Mbps) FH mode (17 Mbps) HQ mode (9 Mbps)</p> <p>Recording/Playback Time: XAVC-L QFHD 100 mode, Approx. 65 min with 64 GB memory card XAVC-L QFHD 60 mode, Approx. 100 min with 64 GB memory card XAVC-L HD 50 mode, Approx. 120 min with 64 GB memory card XAVC-L HD 35 mode, Approx. 170 min with 64 GB memory card XAVC-L HD 25 mode, Approx. 220 min with 64 GB memory card MPEG HD422 @LPCM 2ch 50 Mbps, Approx. 110 min with 64 GB memory card MPEG HD420 @LPCM 2ch HQ</p>		

<i>Item No</i>	<i>Technical Specification Required (Minimum)</i>	<i>Compliance of Specification Offered</i>	<i>Details of Non-Compliance/ Deviation (if applicable)</i>
<i>A*</i>	<i>B*</i>	<i>C</i>	<i>D</i>
	<p>Mode, Approx. 170 min with 64 GB memory card AVCHD@LPCM 2ch PS Mode, Approx. 290 min with 64 GB memory card AVCHD@LPCM 2ch FX Mode, Approx. 340 min with 64 GB memory card AVCHD@LPCM 2ch FH Mode, Approx. 450 min with 64 GB memory card AVCHD@LPCM 2ch HQ Mode, Approx. 750 min with 64 GB memory card Storage Temperature: -4°F to +140°F</p> <p>INPUTS/OUTPUTS SPECIFICATIONS Audio Input: XLR-type 3-pin (female) (x2), line/mic/mic +48 V selectable Audio Output: Integrated into Multi/Micro USB jack(x1), RCA pin(Monaural)(x1) DC Input: DC jack HDMI Output: HDMI connector (Type A) Headphone Output: Stereo mini jack (x1) MIC: Built-in Microphone: Omni-directional stereo electret condenser microphone Remote: Stereo mini-mini jack (Φ2.5 mm) SDI Output: BNC (x1), 3G/HD/SD SMPTE ST 424/ST 292-1/ST 259 standards Speaker Output: Monaural Video Output: Integrated into Multi/Micro USB jack (x1), RCA pin(x1), Composite 1.0Vp-p, 75 Ω</p> <p>LENS SPECIFICATIONS</p>		

<i>Item No</i>	<i>Technical Specification Required (Minimum)</i>	<i>Compliance of Specification Offered</i>	<i>Details of Non-Compliance/ Deviation (if applicable)</i>
<i>A*</i>	<i>B*</i>	<i>C</i>	<i>D</i>
	<p>Filter Diameter: M62 mm</p> <p>Focal Length: f = 9.3 - 111.6 mm equivalent to f = 29.0 - 348.0 mm on 35 mm lens (16:9)</p> <p>Focus: AF/MF selectable, 10 mm to ∞ (Wide), 1000 mm to ∞ (Tele)</p> <p>Iris: F2.8 - F4.5 auto/manual selectable</p> <p>Lens Mount: Fixed</p> <p>Zoom Ratio: 12x (optical), servo</p> <p>MEDIA SPECIFICATIONS</p> <p>Type: MS/SD(1),SD(1)</p> <p>MONITORING SPECIFICATIONS</p> <p>Built-in LCD Monitor: 8.8cm (3.5 type), Approx. 1.56M dots</p> <p>Viewfinder: 1.0cm (0.39 type) OLED, Approx. 1.44M dots</p>		
2	<p>MVH502A Fluid Head and 546B Tripod System with Carrying Bag</p> <p>Head</p> <p>Load Capacity 7.0 kg</p> <p>Counter Balance System Supports 4.0 kg</p> <p>Center of Gravity 5.49 cm</p> <p>Quick Release/Wedge Plate 504PLONG</p>		

<i>Item No</i>	<i>Technical Specification Required (Minimum)</i>	<i>Compliance of Specification Offered</i>	<i>Details of Non-Compliance/ Deviation (if applicable)</i>
<i>A*</i>	<i>B*</i>	<i>C</i>	<i>D</i>
	<p>Tilt Drag Continuously adjustable from 0 to max level</p> <p>Tilt Range -80° / +90°</p> <p>Leg Stages/Sections Yes</p> <p>Spring Loaded Counter Balance Yes</p> <p>Pan Range 360°</p> <p>Pan Lock Yes</p> <p>Legs</p> <p>Material Aluminum</p> <p>Head Attachment Fitting 75mm bov</p> <p>Leg Stages Two/three</p> <p>Center Brace Yes</p> <p>System</p> <p>Load Capacity 7.0 kg</p> <p>Maximum Height 168.00 c</p> <p>Minimum Height 43.99 cr</p> <p>Closed Length 83.01 cr</p> <p>Leveling Bubble/Illuminated Yes/No</p> <p>Weight 5.50 kg</p>		
3	<p>FILMING LIGHTINGS: LED 500 Light Kit Version 2.0</p> <ul style="list-style-type: none"> Four reflective barndoors to maximize the light efficiency 		

<i>Item No</i>	<i>Technical Specification Required (Minimum)</i>	<i>Compliance of Specification Offered</i>	<i>Details of Non-Compliance/ Deviation (if applicable)</i>
<i>A*</i>	<i>B*</i>	<i>C</i>	<i>D</i>
	<ul style="list-style-type: none"> • Metallic mounting bracket to be vertically or horizontally attached • Integrated dimmer dial to have stepless light output control for desired effects • High-brightness LEDs controlled into 4 groups to fine tune the light at your own needs • Cooling fan for prolonged use • Lightweight and compact in size • Light stand • Carry bags <p>SPECIFICATIONS</p> <p>Color Temperature 5600~6200K (1m)</p> <p>Lumen 2200Lux (1m); 550Lux (2m)</p> <p>Power Source (AC) 100V~240V 50/60Hz</p> <p>LED Qty 500pcs</p> <p>Fuse 5A</p> <p>Dimension 352*232*88mm</p>		
4	<p>DIGITAL CAMERA-MOUNT WIRELESS OMNI LAVALIER MICROPHONE SYSTEM (BLACK, 2.4 GHZ)</p> <ul style="list-style-type: none"> • Content Creators, Vlogs, Live Streaming • 2 x Compact Clip-On Transmitter/Mics • 2 x Omnidirectional Lavalier Mics • Compact Dual-Channel Receiver • Separate 3.5mm Main & Headphone Outputs • Easy to Use, Informative OLED Screens 		

<i>Item No</i>	<i>Technical Specification Required (Minimum)</i>	<i>Compliance of Specification Offered</i>	<i>Details of Non-Compliance/ Deviation (if applicable)</i>
<i>A*</i>	<i>B*</i>	<i>C</i>	<i>D</i>
	<ul style="list-style-type: none"> • Mute Function, Mono/Stereo Output Mode • Internal 10-Hour Batteries • Charging Case with 35 Hours of Power • 18 Systems at Once Max, up to 100m Range <p>Specifications</p> <p>System</p> <p>Wireless Technology</p> <p>Digital 2.4 GHz</p> <p>Included Transmitters</p> <p>2 x Clip-On with Microphone</p> <p>Diversity</p> <p>Non-Diversity</p> <p>RF Channel Scanning</p> <p>Auto-Scan</p> <p>Max Operating Range</p> <p>100 m (Line of Sight)</p> <p>Max Transmitters per Band</p> <p>18</p> <p>Sample Rate/Resolution</p> <p>48 kHz / 16-Bit</p> <p>Latency</p> <p>< 8 ms</p> <p>Modulation</p> <p>GFSK</p> <p>SNR</p> <p>>84 dB</p> <p>THD</p> <p>0.1 %</p> <p>Receiver</p> <p>Receiver Type</p> <p>Camera-Mount / Beltpack / Portable</p> <p>Mounting Options</p> <p>Belt Clip, Shoe-Mount (with Included Hardware)</p> <p>Antenna</p> <p>1 x Internal</p> <p>Number of Audio Channels</p> <p>2</p> <p>Audio I/O</p> <p>1 x 3.5 mm TRS Female Unbalanced Output</p> <p>1 x 3.5 mm TRS Female Unbalanced Headphone Output</p>		

<i>Item No</i>	<i>Technical Specification Required (Minimum)</i>	<i>Compliance of Specification Offered</i>	<i>Details of Non-Compliance/ Deviation (if applicable)</i>
<i>A*</i>	<i>B*</i>	<i>C</i>	<i>D</i>
	<p>Audio Output Level -16.5 dBu</p> <p>Frequency Response 20 Hz to 20 kHz</p> <p>USB/Lightning Connectivity 1 x USB Type-C Female (Bus Power, Charging)</p> <p>Power Requirements Battery or Bus Power (USB)</p> <p>Battery Type 1 x Built-In Rechargeable (Included, Not Replaceable)</p> <p>Approx. Battery Life 10 Hours</p> <p>Display & Indicators 1 x OLED (Battery Status, Data)</p> <p>TRANSMITTER</p> <p>Transmitter type: Clip-On with Microphone</p> <p>RF Output Power: < 10 mW</p> <p>Audio I/O: 1 x 3.5 mm TRS Female Unbalanced Input</p> <p>Audio Input Level: -20 to -42 dBV (at 0 dB Gain)</p> <p>Frequency Response: 20 Hz to 20 kHz</p> <p>Antenna: 1 x Internal</p> <p>Power Requirements: Battery or Bus Power (USB)</p> <p>Battery Type: 1 x Built-In Rechargeable (Included, Not Replaceable)</p> <p>Approx. Battery Life: 10 Hours</p> <p>Display & Indicators: 1 x OLED (Audio Level, Battery Status, Mute, Power, Signal Strength)</p> <p>MICROPHONE</p>		

<i>Item No</i>	<i>Technical Specification Required (Minimum)</i>	<i>Compliance of Specification Offered</i>	<i>Details of Non-Compliance/ Deviation (if applicable)</i>
<i>A*</i>	<i>B*</i>	<i>C</i>	<i>D</i>
	<p>Sound Field: Mono</p> <p>Operating Principle: Pressure Operated</p> <p>Capsule: Electret Condenser</p> <p>Polar Pattern: Omnidirectional</p> <p>Maximum SPL: 110 dB SPL</p> <p>THD: < 1%</p> <p>Sensitivity: -39 dB</p> <p>Output: 1 x 3.5 mm TRS Male Unbalanced</p>		
5	<p>UNIVERSAL TRIPOD STAND</p> <ul style="list-style-type: none"> • Phone holder fits phones from 2.25" to 3.75" wide • Safe Load: 3 kg (6.61 lbs) • Maximum Load: 5 kg (11 lbs) • Pan: 360° • Tilt: 180° • Panhead Tilt: 90° • Mounting: 1/4"-20 support • Material: aluminum alloy/ABS • Dimensions: <ul style="list-style-type: none"> - Minimum height: 45 cm ± 0.5 mm (18" ± 0.02") - Maximum height (including center height): 140 cm ± 0.5 mm (55" ± 0.02") - Tube diameter: 20 mm ± 0.5 mm (0.79" ± 0.02") • Weight: 1.25 kg (2.6 lbs) • Color: black • 4-section column legs • 3 adjustment knobs • 1 horizontal bubble level • Compatible with 1/4"-20 devices 		

<i>Item No</i>	<i>Technical Specification Required (Minimum)</i>	<i>Compliance of Specification Offered</i>	<i>Details of Non-Compliance/ Deviation (if applicable)</i>
<i>A*</i>	<i>B*</i>	<i>C</i>	<i>D</i>
6	<p>Mirrorless Camera with 18-45mm and 55-210mm Lenses</p> <ul style="list-style-type: none"> ● 24.2MP APS-C CMOS Sensor ● DIGIC X Image Processor ● UHD 4K 30p Video <p>Recording</p> <ul style="list-style-type: none"> ● Dual Pixel CMOS AF II with 651 Zones ● 2.36m-Dot Electronic Viewfinder <p>Viewfinder</p> <ul style="list-style-type: none"> ● 3.0" 1.62m-Dot Vari-Angle Touchscreen ● 15 fps Electronic Shutter ● Movie for Close-Up Demos Mode ● Vertical Movie Mode ● Multi-Function Shoe, Wi-Fi, and Bluetooth <p>Imaging</p> <p>Lens Mount: RF Sensor Resolution : Effective: 24.2 Megapixel Sensor Type : 22.3 x 14.9 mm (APS-C) CMOS Crop Factor: 1.6x Image Stabilization: None Built-In ND Filter: None Capture Type: Stills & Video</p> <p>Exposure Control</p> <p>Shutter Type: Electronic Shutter</p> <p>Shutter Speed: Electronic Shutter 1/8000 Up to 30 Seconds Electronic Front Curtain Shutter 1/4000 Up to 30 Seconds</p> <p>Bulb/Time Mode: Bulb Mode, Time Mode</p>		

<i>Item No</i>	<i>Technical Specification Required (Minimum)</i>	<i>Compliance of Specification Offered</i>	<i>Details of Non-Compliance/ Deviation (if applicable)</i>
<i>A*</i>	<i>B*</i>	<i>C</i>	<i>D</i>
	<p>ISO Sensitivity: Photo/Video 100 to 32,000 (Extended: 51,200)</p> <p>Metering Method: Center-Weighted Average, Evaluative, Partial, Spot</p> <p>Exposure Modes: Aperture Priority, Manual, Program, Shutter Priority</p> <p>Exposure Compensation: -3 to +3 EV (1/3 EV Steps)</p> <p>Metering Range: -2 to 20 EV</p> <p>White Balance: Presets: Auto, Cloudy, Color Temperature, Custom, Daylight, Flash, Fluorescent (White), Shade, Tungsten</p> <p>Continuous Shooting: Electronic Shutter Up to 15 fps for up to 28 Frames (JPEG) / 7 Frames (Raw) Electronic Shutter Up to 12 fps for up to 42 Frames (JPEG) / 7 Frames (Raw)</p> <p>Interval Recording: Yes</p> <p>Self-Timer: 2/10-Second Delay</p> <p>Still Camera Capture</p> <p>Aspect Ratio: 3:2 Image File Format: C-RAW, HEIF, JPEG, Raw</p> <p>Video Capture Internal Recording Modes: H.264/H.265/MPEG-4</p>		

<i>Item No</i>	<i>Technical Specification Required (Minimum)</i>	<i>Compliance of Specification Offered</i>	<i>Details of Non-Compliance/ Deviation (if applicable)</i>
<i>A*</i>	<i>B*</i>	<i>C</i>	<i>D</i>
	<p>UHD 4K (3840 x 2160) at 23.98/25/29.97 fps 1920 x 1080 at 23.98/25/29.97/50/59.94/100/120 fps</p> <p>Broadcast Output: NTSC/PAL Built-In Microphone Type: Stereo</p> <p>Interface Media/Memory Card Slot: Single Slot: SD/SDHC/SDXC Video I/O: 1 x Micro-HDMI Output Audio I/O: 1 x 3.5 mm TRS Stereo Microphone Input on Camera Body Other I/O: 1 x USB-C Input/Output Wireless: 2.4 / 5 GHz Bluetooth 4.2 Control Mobile App Compatible: Yes</p> <p>Monitor Size: 3" Resolution: 1,062,000 Dot Display Type: Articulating Touchscreen LCD</p> <p>Focus Focus Type: Auto and Manual Focus Focus Mode: Continuous-Servo AF, Manual Focus, Single-Servo AF Autofocus Points: Photo Phase Detection: 4503 Video Phase Detection: 3713 Autofocus Sensitivity: -4 to +20 EV</p> <p>Viewfinder Type: Built-In Electronic (OLED) Size: 0.39" Resolution: 2,360,000 Dot Eye Point: 22 mm Coverage: 100% Magnification: Approx. 96x</p>		

<i>Item No</i>	<i>Technical Specification Required (Minimum)</i>	<i>Compliance of Specification Offered</i>	<i>Details of Non-Compliance/ Deviation (if applicable)</i>
<i>A*</i>	<i>B*</i>	<i>C</i>	<i>D</i>
	<p>Diopter Adjustment: -3 to +1</p> <p>Flash Built-In Flash: Yes Maximum Sync Speed: 1/250 Second Flash Compensation: -3 to +3 EV (1/3 EV Steps) Dedicated Flash System: eTTL External Flash Connection: Intelligent Hot Shoe</p> <p>Environmental Operating Temperature: 0 to 40°C Operating Humidity: 0 to 85%</p> <p>General</p> <p>Battery Type: 1 x LP-E17 Rechargeable Lithium Polymer, 7.2 VDC, 1040 mAh</p> <p>Tripod Mounting Thread: 1 x 1/4"-20 Female (Bottom) Dimensions (W x H x D): 116.3 x 85.5 x 68.8 mm Weight: 375 g (With Battery, Recording Media)328 g (Body Only)</p> <p>RF-S 18-45mm f/4.5-6.3 IS STM Lens</p> <p>Focal Length: 18 to 45mm (35mm Equivalent Focal Length: 29 to 72mm)</p> <p>Maximum Aperture: f/4.5 to 6.3 Minimum Aperture: f/32 Lens Mount: RF Lens Format Coverage: APS-C Angle of View: 74° 20' to 33° 40'</p>		

<i>Item No</i>	<i>Technical Specification Required (Minimum)</i>	<i>Compliance of Specification Offered</i>	<i>Details of Non-Compliance/ Deviation (if applicable)</i>
<i>A*</i>	<i>B*</i>	<i>C</i>	<i>D</i>
	<p>Minimum Focus Distance: 20 cm Maximum Magnification: 0.16x Optical Design: 7 Elements in 7 Groups Diaphragm Blades: 7, Rounded Focus Type: Autofocus Image Stabilization: Yes Filter Size: 49 mm (Front) Dimensions (ø x L): 68.9 x 44.3 mm Weight: 130 g</p> <p>RF-S 55-210mm f/5-7.1 IS STM Lens</p> <p>Focal Length: 55 to 210mm (35mm Equivalent Focal Length: 88 to 336mm)</p> <p>Maximum Aperture: f/5 to 7.1 Lens Mount: RF-S Lens Format Coverage: APS-C Angle of View: 27° 50' to 7° 25' Minimum Focus Distance: 70 cm Maximum Magnification: 0.28x Optical Design: 11 Elements in 8 Groups Diaphragm Blades: 7 Focus Type: Autofocus Image Stabilization: Yes Filter Size: 55 mm (Front) Dimensions (ø x L): 6.9 x 9.4 cm Length at Maximum Extension: 13.5 cm Weight: 270 g</p>		

Specifications and Compliance Sheet Authorised By:

Name:		Signature:	
Position:		Date:	

Authorised for and on behalf of:	Company	
----------------------------------	---------	--

SECTION VI: GENERAL CONDITIONS OF CONTRACT AND CONTRACT AGREEMENT

Any resulting contract shall be placed by means of a Purchase Order/Letter of Acceptance and shall be subject to the General Conditions of Contract (GCC), **Ref: NCS/RFQ/OTRCICT-02/2023/2024.**



Republic of Namibia

Ministry of Labour, Industrial Relations and Employment Creation

Written undertaking in terms of Section 138 of the Labour Act, 2007(Act No. 11 of 2007) and Section 50(2)(d) of the Public Procurement Act, 2015(Act No. 15 of 2015)

1. EMPLOYER’S DETAILS

Company Trade Name:

Registration Number:

Vat Number:

Industry/Sector:

Place of Business:

Physical Address:

Tell No:

Fax No:

Email Address:

Postal Address:

Full name of Owner/Accounting Officer:

.....

Email Address:

2. PROCUREMENT DETAILS

Procurement Reference No:

Procurement Description:

.....

.....

Anticipated Contract Duration:

Location where work will be done, good/services will be delivered: **OTJIWARONGO**

3. UNDERTAKING

I*[insert full name]*, owner/representative

of*[insert full name of company]*

hereby undertake in writing that my company will at all relevant times comply fully with the relevant provisions of the Labour Act and the Terms and Conditions of Collective Agreements as applicable.

I am fully aware that failure to abide to such shall lead to the action as stipulated in Section 138 of the Labour Act, 2007(Act No. 11 of 2007), which include but not limited to the cancellation of the contract/licence/grant/permit or concession.

Signature:

Date:

Seal:

Please take note:

1. *A labour inspector may conduct unannounced inspections to assess the level of compliance*
2. *This undertaking must be displayed at the workplace where it will be readily accessible and visible by the employees rendering service(s) in relations to the goods and services being procured under this contract.*

SCHEDULE 2:**QUOTATION CHECKLIST SCHEDULE****Procurement Reference No.: G/RFQ/OTRCICT-02/2023/2024**

Description	Attached (please tick if submitted and cross if not)
Bid Letter	
List of Goods and Price Schedule	
Specification and Compliance Sheet	
Bid Securing Declaration	
Evidence for conformity of Goods	
Valid copy of Company Founding Statement;	
Valid original or certified copy of Good Standing Tax Certificate;	
Valid original or certified copy of Good Standing Social Security Certificate;	
Valid certified copy of Affirmative Action Compliance Certificate, proof from Employment Equity Commissioner that bidder is not a relevant employer, or exemption issued in terms of Section 42 of the Affirmative Action Act, 1998;	
Signed written undertaking as contemplated in section 138(2) of the Labour Act, 2007	

Disclaimer: *The list defined above is meant to assist the Bidder in submitting the relevant documents and shall not be a ground for the bidder to justify its non-submission of major documents for its quotation to be responsive. The onus remains on the Bidder to ascertain that it has submitted all the documents that have been requested and are needed for its submission to be complete and responsive.*